



Strong Mechanism

Intense Usage

Trouble-free Long Years

Vandal-proof

Reliable

Spare Parts Support

Indoor & Outdoor Conditions

T 281

ELEKTROMECHANIC TURNSTILE

T 281

ELECTROMECHANIC TURNSTILE

T 281 tripod turnstile provides the basic access control solution to secure various locations worldwide. The mechanism is designed and manufactured by MAKİM to ensure long years of trouble free use, especially for locations with intense passage flows.

Application

T 281 can be installed and used trouble-free in various locations like public transportation terminals, universities, banks, business centers, museums, sport centers and amusement parks etc.

Basic Materials


T 281 is produced in AISI 304 stainless steel. All arms and body are made of 304 stainless steel and the core is made of aluminum material against corrosion. The feature that distinguishes T 281 from other tripod turnstiles is that it is heavier and its back is closed. As T 281 has convenient space for coin mechanism and coin case, it is suitable for coin passages. As an option, it can be produced from 316 stainless steel. The inner main mechanism of T 281 is produced with special investment casting technology, which makes the whole system a lot more robust and lasting. The electronic boards are designed by the qualified engineers of Makim, enabling T 281 operate in various modes and integrations.

General Usage

T 281 electromechanic turnstile operates bidirectionally. Any kind of access control system like card reader, biometric reader, remote control unit or push button can be integrated to T 281 via simple dry-contact. Once the access right is granted, user should touch slightly to T 281 arm in order to make it rotate. After the tripods complete one turn, T 281 is automatically locked. If the user does not use the passage right in 15 seconds, T 281 will give buzzer warning and it will be locked. Status indicator LED lights are located on both sides of T 281, in green arrow and red cross shape to show allowed passage directions. Passage rate is upto 30 person/minute

Safety

In case of power cut, T 281 is unlocked to allow free rotation of the arms in both sides. As an optional, Makim can produce T 281 with drop-arm mechanism. In this case, once T 281 receives a signal from the emergency system, the blocking arm will drop to provide a completely free passage lane for quick evacuation of the area.

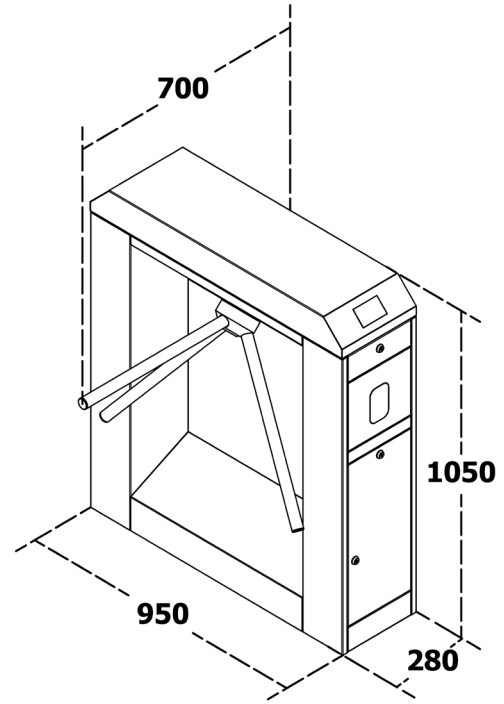

Control /Operation Voltage	100-230 VAC 50/60 Hz
Power Consumption	30 W
Operation Temperature	- 20° C - + 70° C With Optional Heater - 30° C
Passage Speed	30 P / Min.
Passage Range	Min. 43 cm / Max. 47 cm
Weight	60 Kg
Usage Area	Indoor / Outdoor
Optional Accessories	Drop-arm, remote control, button unit, card reader, biometric reader, counter, coin mechanism
Security Level	●●●●○

ELECTROMECHANICAL FACTORY

Address: Ankara Uçay ve Havacılık İhtisas OSB, HAB OSB Mahallesi, B25 cadde No:3 06980 Kahrmankezan/Ankara
Phone: +90 (312) 267 56 87 Fax: 0 (312) 267 56 99
satis@makim.com.tr

ACCES CONTROL SALES OFFICE ANKARA

Address: Batı Sitesi Mah. Gersan, 2307 Sk/3.Cad. No:16 06970 Ergazi / Ankara
Phone: +90 (312) 257 05 52 Fax: 0 (312) 257 02 55
pazarlama@makim.com.tr

ACCES CONTROL SALES OFFICE İSTANBUL

Address: Perpa Ticaret Merkezi, B Blok Kat: 7-8 No: 987-989 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr

WAREHOUSE AND TECHNICAL DELIVERY

Address: Perpa Ticaret Merkezi, B Blok Kat: 1-2 No:57 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr